


INSTALLATION CHECK LIST

- (A) Center bolt contains safety valve. Clean thoroughly with solvent and air blast. Be certain valve disc is free to operate.
- (B) Make sure that only one Rubber Seal is used here.
- (C) Check end of bowl and holes in Center Bolt for signs of distortion caused by over-tightening (crushed bowl or stretched bolt can cause bowl leakage or flow restriction).

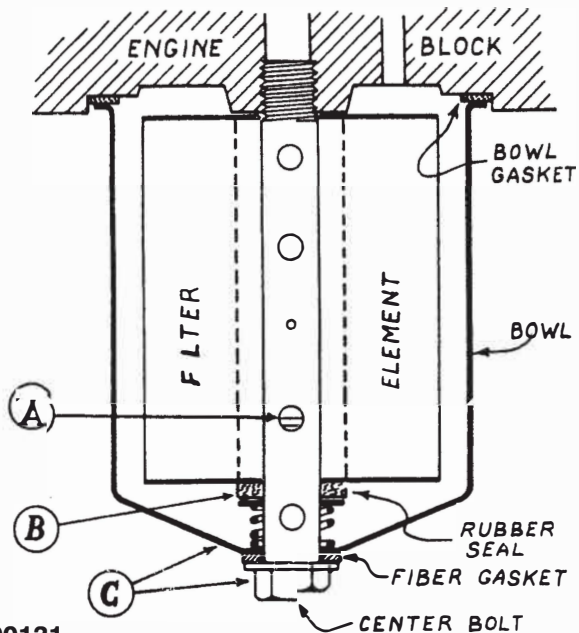

200131