

B40056

Lube Spin-on

NEW RELEASE

Compressors used in construction and mining environments are subjected to extreme conditions and high amounts of contamination, which can get into the compressor's engine. Baldwin filters with Highly Engineered Layered Media (HELM™), like the B40056, ensure your engine gets the protection it needs.

APPLICATIONS

Doosan Compressors with Kubota, John Deere, Yanmar Engines

CROSS-REFERENCE

Doosan 23279078;
Ingersoll-Rand 23279078;
Fleetguard LF17495;
Napa Gold 220137;
Wix WS10137

SPECIFICATIONS

Contains: 25 PSID By-Pass Valve
Thread: M27 x 2.0
O.D.: 3 23/32 (94.5)
Length: 5 3/8 (136.5)
A. Gskt.: [1] Included


PACKAGING

UPC: 7 91440 10784 7
Case Quantity: 12
Case Weight: 16.1 lbs. (7,3 kgs.)
Filter Weight: 1.3 lbs. ea. (0,608 kgs. ea.)
Volume: 0.050 ft³ ea. (0,001 m³ ea.)




B40056 vs DOOSAN 23279078

EFFICIENCY (%)

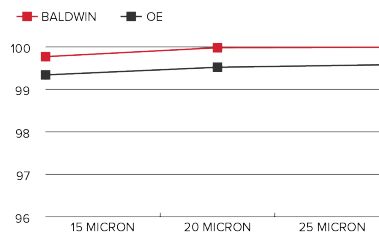

ISO 4548-12 Test: Flow Rate 3 gpm, ISO Medium Test Dust, 104°F, Termination at 15 psid

CAPACITY (g)

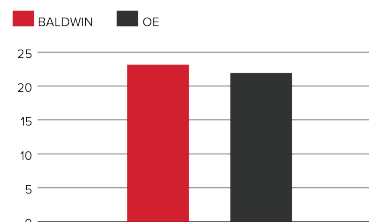

ISO 4548-12 Test: Flow Rate 3 gpm, ISO Medium Test Dust, 104°F, Termination at 15 psid

This product is now available. Contact your Customer Service Representative to order.

WARNING: These products can expose you to chemicals, including Diisononyl Phthalate, Carbon black extracts, Nickel, 1,3 Butadiene, Ethylene Oxide, Epichlorohydrin, which are known to the State of California to cause cancer, and Bisphenol-A, Ethylene Glycol, Ethylene Oxide, 1,3 Butadiene, Epichlorohydrin, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.