


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (IN. W.G.)	Media Area (Square Feet)	MERV
PLT12-M11-04-PH	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2000	0.19	108	11
PLT12-M11-15-PH	20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	1650	0.19	90	11
PLT12-M11-13-PH	20 X 20 X 12	19-3/8 X 19-3/8 X 11-1/2	1400	0.19	73	11
PLT12-M11-03-PH	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	1000	0.19	49	11

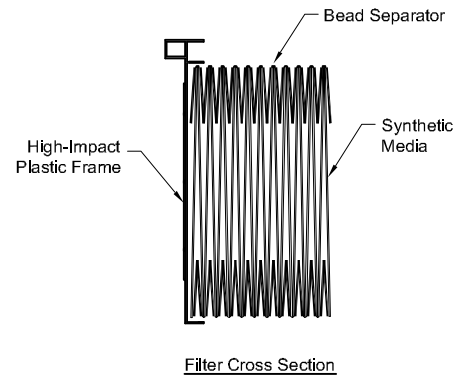

**STANDARD CONSTRUCTION**

1. White, Synthetic Media
2. E-Pleat Technology Pleat Pack  
Embossed Media with Adhesive Bead Separators
3. High-Impact Plastic Frame Panels
4. Foamed Hot Melt Sealant
5. Gasket Optional

**NOTES**

1. Testing per ASHRAE 52.2-2017  
Tested at 492 FPM on 24x24 Face Size
2. Final Resistance: 1.5" W.G.
3. Rated Velocity - 500 FPM
4. Maximum Operating Temperature: 170 deg. F (76 deg. C)
5. Classified per UL Standard 900 for Flammability
6. Special Sizes Not Available.



HVAC Filtration Division  
100 River Ridge Circle  
Jeffersonville, IN 47130  
P: 866-247-4827  
F: 866-601-1809

CONTACT FACTORY TO  
VERIFY REVISION LEVEL

**TOLERANCES  
UNLESS OTHERWISE SPECIFIED**

FRACTIONAL -  
DECIMAL -  
ANGLES -

ALL DIMENSIONS IN INCHES

DRAWING NAME

PARKER LOADTECH PLT12-M11 PH

APPROVED BY

*K. Quinn*

SPECIFICATION NO.

MKT-B-00753

PAGE 1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

NEW

REVISION DATE

11-11-19

THIS MATERIAL IS PROPRIETARY, BEING EXCLUSIVELY OWNED BY PARKER HANNIFIN CORPORATION. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS. ALL RIGHTS RESERVED.