


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (IN. W.G.)	Media Area (Square Feet)	MERV
PLT12-M14-04-PH	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2000	0.38	105	14
PLT12-M14-15-PH	20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	1650	0.38	86	14
PLT12-M14-13-PH	20 X 20 X 12	19-3/8 X 19-3/8 X 11-1/2	1400	0.38	71	14
PLT12-M14-03-PH	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	1000	0.38	46	14

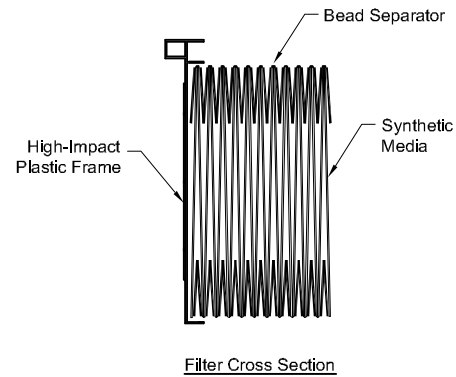


STANDARD CONSTRUCTION

- 100% Gold Tinted Synthetic Media
- E-Pleat Technology Pleat Pack Embossed Media with Adhesive Bead Separators
- High-Impact Plastic Frame Panels
- Foamed Hot Melt Sealant
- Gasket Optional

NOTES

- Testing per ASHRAE 52.2-2017
Tested at 492 FPM on 24x24 Face Size
- Final Resistance: 1.5" W.G.
- Rated Velocity - 500 FPM
- Maximum Operating Temperature: 170 deg. F (76 deg. C)
- Classified per UL Standard 900 for Flammability
- Special Sizes Not Available.

 <p>HVAC Filtration Division 100 River Ridge Circle Jeffersonville, IN 47130 P: 866-247-4827 F: 866-601-1809</p>	<p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p> <p>FRACTIONAL — DECIMAL — ANGLES —</p>	DRAWING NAME PARKER LOADTECH PLT12 PH			
		APPROVED BY <i>K. Quinn</i>	SPECIFICATION NO. MKT-B-00729	PAGE 1 OF 1	
<p>CONTACT FACTORY TO VERIFY REVISION LEVEL</p>		SCALE NONE	DWG. SIZE A	REVISION NEW	REVISION DATE 05-15-19
		<p><small>THIS MATERIAL IS PROPRIETARY, BEING EXCLUSIVELY OWNED BY PARKER HANNIFIN CORPORATION. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS. ALL RIGHTS RESERVED.</small></p>			
<p>ALL DIMENSIONS IN INCHES</p>					