


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Airflow (CFM)	Initial Resistance (In W.G.)	Media Area (Square Feet)
KPH-STD4-2404	12 X 24 X 4	11-3/8 X 23-3/8 X 3-3/4	1000	0.15	13.0
KPH-STD4-6004	16 X 20 X 4	15-1/2 X 19-1/2 X 3-3/4	1120	0.15	14.9
KPH-STD4-6504	16 X 25 X 4	15-1/2 X 24-1/2 X 3-3/4	1400	0.15	18.8
KPH-STD4-8404	18 X 24 X 4	17-3/8 X 23-3/8 X 3-3/4	1500	0.15	19.7
KPH-STD4-0004	20 X 20 X 4	19-1/2 X 19-1/2 X 3-3/4	1400	0.15	18.5
KPH-STD4-0404	20 X 24 X 4	19-3/8 X 23-3/8 X 3-3/4	1670	0.15	22.2
KPH-STD4-0504	20 X 25 X 4	19-1/2 X 24-1/2 X 3-3/4	1750	0.15	23.3
KPH-STD4-4404	24 X 24 X 4	23-3/8 X 23-3/8 X 3-3/4	2000	0.15	26.5

\* Reverse Pleat

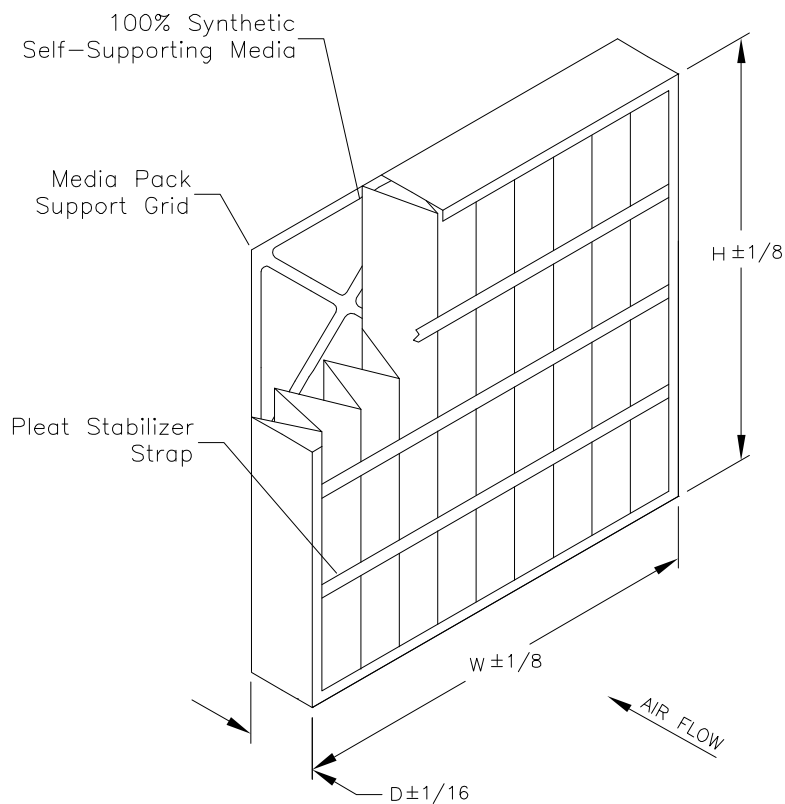

**STANDARD CONSTRUCTION**

- 100% Synthetic, Self-Supporting Media
- 11.3 Pleats per Foot
- (3) Pleat Stabilizer Straps, Upstream Side
- Media Pack Support Grid, Downstream Side
- Moisture Resistant Beverage Board Frame

**NOTES**

- Average Efficiency: MERV 8 ASHRAE 52.2-2012  
Tested at 492 FPM on 24x24x1 nominal size.
- MERV-A 8-A ASHRAE 52.2-2012 Appendix J
- Final Resistance: 1.0" W.G.
- Rated Velocity: 500 FPM
- Classified Per UL Standard 900 For Flammability
- Maximum Operating Temperature: 150 deg. F



100 River Ridge Circle  
Jeffersonville, IN 47130  
P: 866-925-2247  
F: 866-601-1809  
www.clair.com/purolator

**CONTACT FACTORY TO  
VERIFY REVISION LEVEL**

**TOLERANCES  
UNLESS OTHERWISE SPECIFIED**

FRACTIONAL -  
DECIMAL -  
ANGLES -

ALL DIMENSIONS IN INCHES

DRAWING NAME

**KEY PLEAT HIGH CAPACITY SSP 4" DEPTH**

APPROVED BY

*K. Quinn*

SPECIFICATION NO.

MKT-P-00597

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

E

REVISION DATE

05-19-15

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLAIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.