



Compressed Air & Gas Filtration Products

Finite Capabilities Guide



ENGINEERING YOUR SUCCESS.

Basics of Coalescing Filtration

Q. What is Coalescing filtration?

A. A steady state process whereby aerosols are caused to agglomerate (come together) into even larger droplets as they pass through the filter elements' fiber matrix, eventually becoming large enough to be gravitationally drained away.


Q. Why filter compressed air?

A. Submicronic contaminants in compressed air systems can:


- Plug orifices of sensitive pneumatic instrumentation
- Wear out seals
- Erode system components
- Reduce the absorptive capacity of desiccant air/gas dehydrators
- Foul heat transfer surfaces
- Reduce air tool efficiency resulting in:
 - Product rejects
 - Lost production time
 - Increased maintenance costs

For example, trace amounts of submicronic oil can cause serious fish eye blemishing in automotive finishing operations. Water left in air lines can freeze during exposure to cold, blocking flow or rupturing pipes.

Compressor lubricant not captured in a coalescing filter will eventually collect in pneumatic components, causing premature component repair or replacement. Environmental concerns will be raised if oily, compressed air is continually discharged into the atmosphere through a pneumatic muffler.

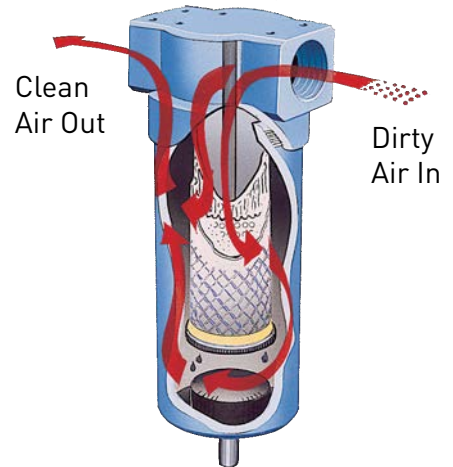

This filter housing cutaway depicts the coalescing process. Air enters the housing and flows through the filter media passing from the inside element surface to the outside. Coalesced liquid collects in the housing where it is drained, and clean air exits the housing through the outlet port.

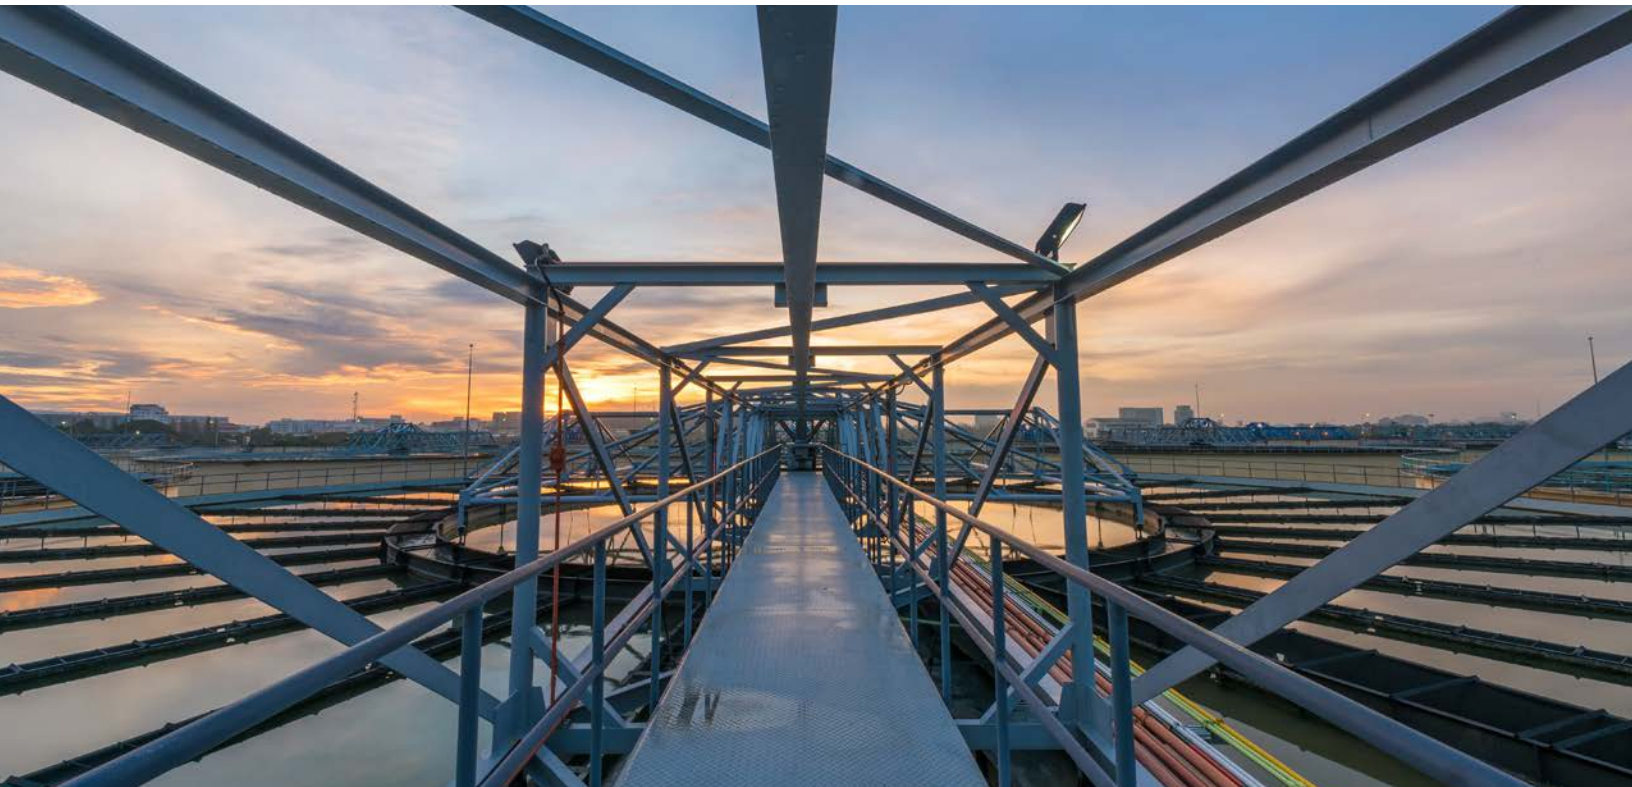

What Separates Finite Filters from the Competition?

Superior Design and Construction

Our UNI-CAST glass microfiber filters, formed with a proprietary vacuum process, combine surface (edge) filtration with enhanced depth filtration. UNI-CAST pore construction traps larger pore-clogging particles on the surface while allowing access to the element's internal fiber matrix for coalescing and submicron particulate removal. The result is lower pressure drop and less frequent change-outs, saving you time and money.

OEM Capabilities

When you need a special filter for a unique application, Finite filter experts are ready to work with you. We'll tailor a configuration to meet your special need from the wide variety of filter media available. In Addition, with LEAN manufacturing, we can produce specials in reasonable quantities, in a reasonable amount of time, at a reasonable price. Not only will this enhance the performance of your product, but it will benefit you with aftermarket sales of replacement elements.

Value-Added Services

In addition to our broad selection of quality filters, we offer value-added services including:

- Custom branding
- Kitting
- Local Parker stores
- Compressed air analysis
- In-house training
- Competitor interchange elements

Finite Filters and Accessories

- Compressed air/gas filters
- Par-Fit™ conversion elements
- Instrumentation and gas sampling filters
- CNG/Alternative fuel filters
- Steam and vacuum exhaust filters
- Air dryers
- Drains, gauges, and other accessories



Finite offers a full line of low to high pressure gauges, brackets, and drains.



Compressed Air and Gas Treatment Filtration Products

Whether you depend on it to clean, clamp, coat, convey, cool, or control, compressed air is just as important in the industrial environment as gas, water, and electricity. Finite coalescing, particulate, and adsorption filters, dryers, and compressed air accessories ensure that clean compressed air is available for all your industrial applications.

Applications

- Spray painting
- Powder coating
- Blow molding
- Printing
- Packaging
- Pneumatic conveying
- Air gauging
- Air bearings



Filters-Regulators-Lubricators

- Two- and three-unit combos
- Metal and polycarbonate bowls available
- Pressures to 250 PSIG
- Connections from 1/8" to 1/2" NPT



Water Separators

- Remove bulk water from your application
- Connections from 1/4" to 3" NPT
- Pressures to 230 PSIG
- Flows from 25-17,000 SCFM
- Temperatures up to 175° F



Par-Fit™ Conversion Elements

- Coalescing, particulate and adsorption elements
- Offer UNI-CAST Finite advantage
- Over 2500 interchanges available



ASME Coded Vessels

- Coalescing, particulate, and adsorption
- Pressures to 185 PSIG
- Temperatures up to 450° F
- Connections from 3" NPT to 16" flange
- Flows up to 37,000 SCFM
- Custom designs available
- Available with a variety of filtration media
- Captures .01 - 100 micron



International H-Series

Finite's H-Series compressed air filters are the most widely used filter. Our standard grade 6 element captures 99.97% of particulate, oil, and water contamination.

- Coalescing, particulate, and adsorption elements
- Pressures to 500 PSIG
- Temperatures up to 450° F
- .01 - 100 micron
- Connections from 1/4" to 3" NPT, BSPF, & BSPT
- Flows from 10 to 1600 SCFM
- Available with a variety of filtration media



HX Series Filters

- 1/4" - 3" NPT
- 15-1,300 SCFM
- 290 PSIG
- Temperatures up to 212° F
- .01 - 100 micron



SN3L & SN4L Stainless Steel Filters for Harsh Environments

- 3/4" - 1" NPT
- 80-170 SCFM
- Pressures up to 250 PSIG
- Temperatures up to 450° F
- .01 - 100 micron



Membrane Dryers

- Compressed air hollow fiber membrane dryers
- Pressure dewpoints down to -40° F
- Connections from 1/4" to 1/2" NPT
- Flows up to 40 SCFM



FDD Desiccant Dryers

- For point-of-use and OEM applications
- Pressure dewpoints down to -40° F
- Connections from 1/4" to 1" NPT
- Ideal for intermittent flows



Accessories

- Differential pressure gauges
- Float, solenoid, and zero-air-loss drains
- Mounting brackets and adapter kits





Alternative Fuel and High Pressure Filtration Products

Performance under pressure

From the gas well to the dispenser, Parker offers a full line of compressed natural gas filters.



High pressures encountered in CNG (Compressed Natural Gas) and other alternative fuel systems add another dimension to filter performance and magnify the problems of preventing contamination. Excessive amounts of liquid aerosols and solid particulate contamination lead to poor component performance, wear, and unscheduled maintenance. Finite offers a variety of high-pressure compressed air and gas filters for every stage of compression.

Applications

- CNG refueling stations
- CNG on-board vehicle systems
- Hydrogen refueling stations
- Hydrogen on-board vehicle systems
- Natural gas processing
- Landfill methane filtration
- Off-shore oil drilling
- Process/chemical plants
- High pressure (SCUBA) breathing air
- Hydraulic test systems
- Plastic bottle blow molding

International H-Series

Finite's H-Series compressed air filters are the most widely used filter. Our standard grade 6 element captures 99.97% of particulate, oil, and water contamination.

- Coalescing, particulate, and adsorption elements
- Pressures to 500 PSIG
- Temperatures up to 450° F
- .01 -100 micron
- Connections from 1/4" to 3" NPT, BSPF & BSPT
- Flows from 10 to 1600 SCFM
- Available with a variety of filtration media





Medium Pressure Filters, M-Series

- Pressures to 800 PSIG
- Connections from 1/4" to 2" NPT, BSPT & BSPF
- Use with specialty gases
- Variety of filter elements available
- Flows from 6-590 SCFM
- Temperatures up to 175°F
- Captures .01-100 micron



High Pressure Filters, J-Series

- CNG, alternative fuel and breathing air filters
- Pressures to 5000 PSIG
- Ductile iron and nodular cast iron
- Coalescing, particulate, and adsorption filter elements available
- 1/4"-2" NPT
- Flows from 15-26, 230 SCFM
- Temperatures up to 350°F
- Captures from .01-100 micron



Stainless Steel Filters

High Pressure Stainless Steel Filters, SJ-Series

- Compatible with high pressure specialty gases
- Pressures to 6000 PSIG
- Stainless steel
- Variety of filter elements available
- Temperatures up to 350°F
- Captures .01 to 3 micron



SN3L & SN4L Stainless Steel Filters for Harsh Environments

- Used in the most demanding environments
- Pressures from 250 PSIG
- Connections from 3/4" to 1" NPT
- Flows up to 170 SCFM



High Flow Stainless Steel Filters, SNS8

- 2" NPT
- Pressures to 500 PSIG
- Temperatures up to 175°F
- Variety of filter elements available





Alternative Fuel and High Pressure Filtration Products

High Pressure Drains

- Safely drain condensate under pressure
- Pressures to 6000 PSIG
- Directly connect to J-Series and SJ-Series
- Horizontal or vertical mounting



ASME Coded Vessels

- Coalescing, particulate and adsorption
- Pressures to 185 PSIG
- Connections from 3" NPT to 16" flange
- Flows up to 37,000 SCFM
- Available with a variety of filtration media



Replaceable Liquid Propane Filters (LPGR-200)

- 1/2" NPT, SAE-8
- Flows from 1-1.5 and 4-10 GPM
- Pressures up to 800 PSIG
- Temperatures up to 250°F
- Captures 1-5 micron



Disposable Liquid Propane Filters (LPGD-200)

- 1/2" SAE
- Flows from 1-1.5 and 4-10 GPM
- Pressures up to 500 PSIG
- Temperatures up to 250°F
- Captures 1-5 micron






On-Board CNG Filtration

Compressed Natural Gas, or CNG, is a leading alternative to traditional fuel for the automotive industry. CNG is used in passenger vehicles, pickup trucks, in transit and on school buses. It can be less expensive than gasoline, and is more environmentally friendly – it reduces the amount of carbon monoxide, carbon dioxide and hydrocarbon vehicle exhaust emissions.

Natural gas is gathered from a pipeline and travels to a connecting compressor station. The gas is elevated to pressures ranging from 2000 PSIG up to 5000 PSIG and the resultant CNG is stored in large tanks. The CNG then makes its way to a gas dispenser where it is ready for use in natural gas vehicles.

Contaminants can enter into the gas at any stage of this processing. Filters are critical at each stage to ensure clean gas as a final product. Contamination that collects during handling, water that condenses in tanks and compressors that leak oil into the fuel stream are all problems that could shorten the life of expensive equipment, create unnecessary downtime and increase maintenance costs.

From pipeline to engine, Finite filters provide the critical filtration required for most alternative fuel systems.

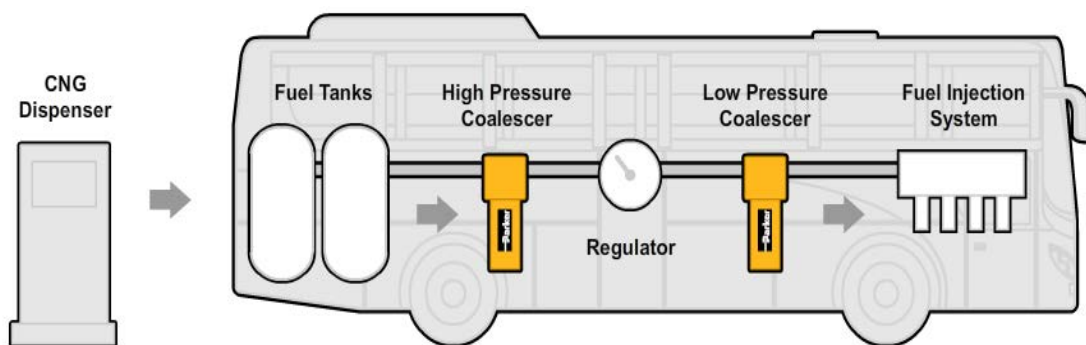

FFC-110

- 1/4" - 1/2" NPT
- 6-590 SCFM
- Pressures up to 800 PSIG
- Temperatures up to 221° F



FFC-112

- 1/4" NPT
- 12-576 SCFM
- Pressures up to 3,600 PSIG
- Temperatures up to 221° F



FFC-113

- 1/2" NPT
- 34-1,922 SCFM
- Pressures up to 3,600 PSIG
- Temperatures up to 221° F



Parker offers kitting for system applications. This assembly is used to provide breathable air for five people.

Gas Sampling and Specialty Filtration

Protect your products and your working environment

Finite filters eliminate overall contamination, taste differences, and odors in food products and facilitate sterilization in hospitals and pharmaceutical processing facilities. Finite filters provide absolute rated filtration for contaminants as small as $0.01\mu\text{m}$ to assure contamination-free processing in semiconductor, pharmaceutical, food and beverage applications.

Applications

- Food, beverage sanitization, and cooking
- Dairy and meat packing sanitation
- Air conveying of dry food products
- Compressed air bakery mixing
- Pharmaceutical manufacturing
- Hospital sterilization
- Respirator air purification
- Laboratory gas sampling
- Industrial breathing air

Analytical Gas Sampling Filters

- Gas analyzer protection
- Pressures to 6000 PSIG
- Stainless steel and aluminum housings
- Variety of filter elements available
- 1/8"-1/4" NPT
- Flows from 2-45 SCFM (aluminum)
- Flows from 2-437 SCFM (stainless steel)
- Pressures up to 1000 PSIG (aluminum)
- Pressures up to 5000 PSIG (stainless steel)
- Temperatures up to 225°F (aluminum)
- Temperatures up to 400°F (stainless steel)
- Captures .01-100 micron





Low Flow Instrumentation Filters

- Stainless steel, aluminum, and plastic housings
- Clear bowls available
- Connections from 1/8" to 2" NPT
- Pressures to 5000 PSIG




Specialty Filter Elements - Par-Fit Series

- Coalescing, particulate and adsorption filter media
- Filter media ranging from stainless steel mesh to PTFE membrane
- Compatible with a variety of gases, including refrigerant



Disposable Gas Sampling Filters

- Pressures up to 100 PSIG
- Connections from 1/8" - 1/4"
- Flows from .8-5.3 SCFM
- Temperatures up to 125°F
- Captures from .01-44 micron



Worldwide Filtration Manufacturing Locations

North America

Compressed Air Treatment

Industrial Gas Filtration and Generation Division

Lancaster, NY
716 686 6400
www.parker.com/igfg

Haverhill, MA
978 858 0505
www.parker.com/igfg

Engine Filtration

Racor

Modesto, CA
209 521 7860
www.parker.com/racor

Holly Springs, MS
662 252 2656
www.parker.com/racor

Hydraulic Filtration

Hydraulic & Fuel Filtration

Metamora, OH
419 644 4311
www.parker.com/hydraulicfilter

Laval, QC Canada
450 629 9594
www.parkerfarr.com

Velcon
Colorado Springs, CO
719 531 5855
www.velcon.com

Process Filtration

domnick hunter Process Filtration SciLog

Oxnard, CA
805 604 3400
www.parker.com/processfiltration

Water Purification

Village Marine, Sea Recovery, Horizon Reverse Osmosis

Carson, CA
310 637 3400
www.parker.com/watermakers

Europe

Compressed Air Treatment

domnick hunter Filtration & Separation

Gateshead, England
+44 (0) 191 402 9000
www.parker.com/dhfn

Parker Gas Separations

Etten-Leur, Netherlands
+31 76 508 5300
www.parker.com/dhfn

Hiross Zander

Essen, Germany
+49 2054 9340
www.parker.com/hzfd

Padova, Italy
+39 049 9712 111
www.parker.com/hzfd

Engine Filtration & Water Purification

Racor

Dewsbury, England
+44 (0) 1924 487 000
www.parker.com/rfde

Racor Research & Development

Stuttgart, Germany
+49 (0)711 7071 290-10

Hydraulic Filtration

Hydraulic Filter

Arnhem, Holland
+31 26 3760376
www.parker.com/hfde

Urijala, Finland
+358 20 753 2500

Condition Monitoring Parker Kittiwake

West Sussex, England
+44 (0) 1903 731 470
www.kittiwake.com

Process Filtration

domnick hunter Process Filtration Parker Twin Filter BV

Birtley, England
+44 (0) 191 410 5121
www.parker.com/processfiltration

Asia Pacific

Australia

Castle Hill, Australia
+61 2 9634 7777
www.parker.com/australia

China

Shanghai, China
+86 21 5031 2525
www.parker.com/china

India

Chennai, India
+91 22 4391 0700
www.parker.com/india

Parker Fowler

Bangalore, India
+91 80 2783 6794
www.johnfowlerindia.com

Japan

Tokyo, Japan
+81 45 870 1522
www.parker.com/japan

Korea

Hwaseon-City
+82 31 359 0852
www.parker.com/korea

Singapore

Jurong Town, Singapore
+65 6887 6300
www.parker.com/singapore

Thailand

Bangkok, Thailand
+66 2186 7000
www.parker.com/thailand

Latin America

Parker Comercio Ltda.

Filtration Division
Sao Paulo, Brazil
+55 12 4009 3500
www.parker.com/br

Pan American Division

Miami, FL
305 470 8800
www.parker.com/panam

Africa

Aeroporto Kempton Park, South Africa
+27 11 9610700
www.parker.com/africa

© 2019 Parker Hannifin Corporation. Product names are trademarks or registered trademarks of their respective companies

BRO_FNT_Capabilities_082019
1300-2008



Parker Hannifin Corporation
Industrial Gas Filtration
and Generation Division
4087 Walden Avenue
Lancaster, NY 14086
phone 800 343 4048
www.parker.com/igfg

